

G80BCC-P05QF00-0000

odu_mini_snap®_series_b



receptacle_with_break_away_and_push_pull_locking_for_rear_panel_mounting

size: 0, IP68, keying: c, number_of_contacts: 5, pcb, contact_type: sockets, Signal



Basic information

| | |
|--------------------|---------------------|
| Part number | G80BCC-P05QF00-0000 |
| Category | connector |
| Type of connector | receptacle |
| Assembly situation | rear_panel_mounting |
| Size | 5feceb |

Contact insert description

| | |
|----------------------|---------|
| Transmission type | Signal |
| Number of contacts | 5 |
| Contact type | sockets |
| Contact diameter | ec72e6 |
| Termination type | pcb |
| Termination diameter | 88d6d3 |

Technical information

| | | |
|--|-----------------------------|--|
| Max. current single contact | 9eeaa1 | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Max. current insert | 4.5 | VDE 0298-4:2003 |
| Test voltage | 1.1 kV AC | SAE AS 13441:1998 method 3001.1 |
| Max. creepage distance (contact to contact) | 0.7 mm (Contact to housing) | |
| Max. creepage distance (contact to housing) | 0.8 mm (Contact to housing) | |
| Max. clearance distance (contact to contact) | 0.7 mm (Contact to contact) | |
| Max. clearance distance (contact to housing) | 0.8 mm (Contact to housing) | |


Mechanical and environmental data

| | |
|----------------------------|------------------------|
| Locking principle | break_away , push_pull |
| Keying | coding_45° |
| Mating cycles | 9e1839 |
| IP class | IP68 |
| Max. operating temperature | 120 °C |
| Min. operating temperature | -40 °C |
| Tightening torque | 1.7 Nm |
| Weight | 8.96 g |


Material and surface treatments

| | |
|------------------|----------------------------------|
| Material | cu_alloy_with_matt_chrome_finish |
| Contact material | gold |


DIMENSIONS:

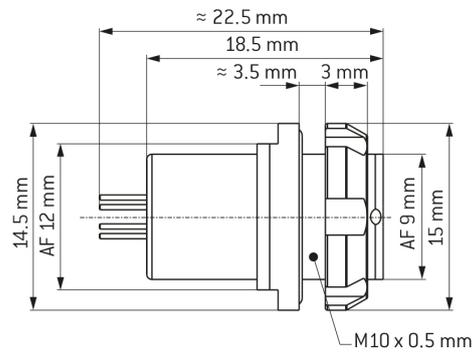

POSITIONS: 5 Positions



PANEL CUT OUT:

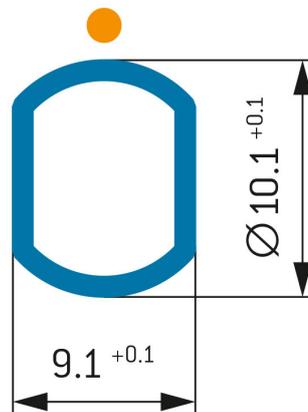

Further technical information and downloads

[3D-File \(STP File\)](#)