
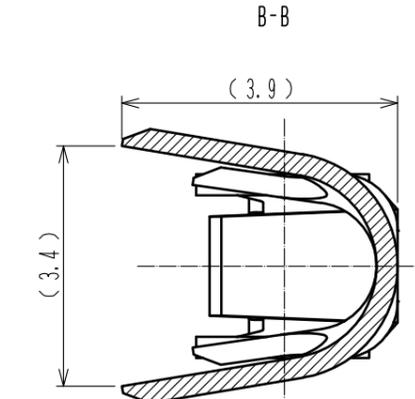
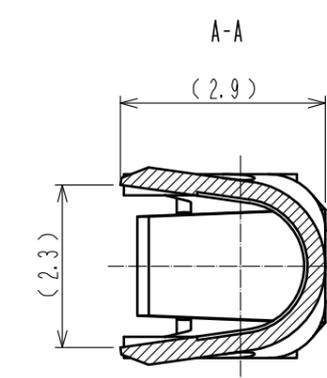
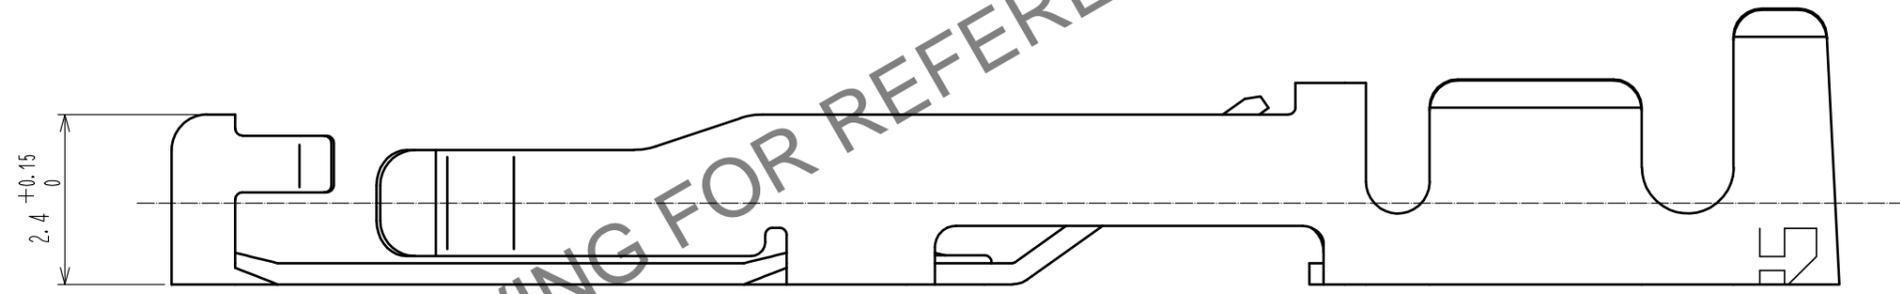
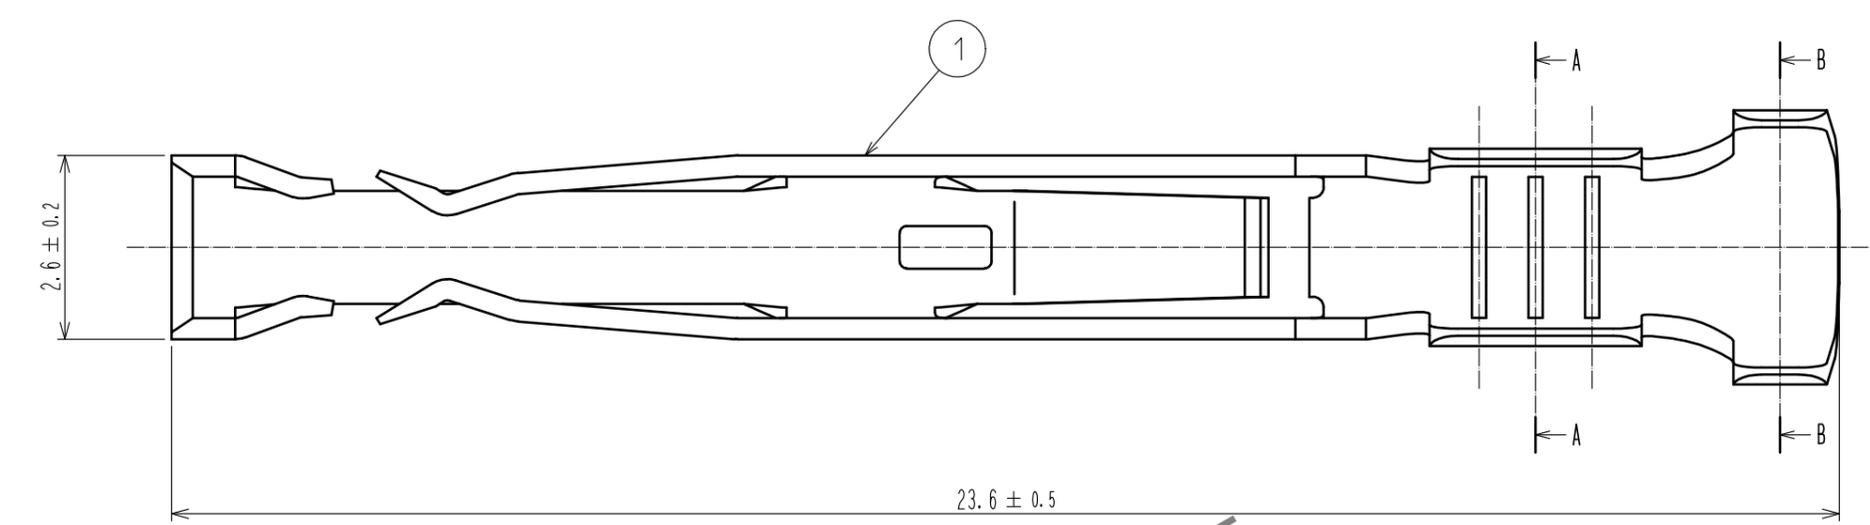


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

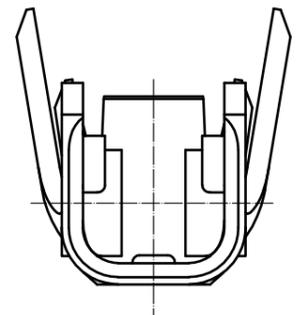

- Notes
- 1 This product is apply to the wire #16 to #20.
(Jacket diameter : ϕ 1.9 to 3.2mm)
 - 2 Applicable crimping tool : HT802/HR41A-11-16 (CL150-0408-5)(Applicable to AWG#16)
 HT802/HR41A-11-18 (CL150-0404-4)(Applicable to AWG#18)
 HT802/HR41A-11-20 (CL150-0407-2)(Applicable to AWG#20)
 - 3 Applicable extraction tool : HR41A-TP(CL150-0405-7)
 - 4 Per reel : 100 contacts
 - 5 Contact plating : Gold plating 0.2 μ m min.
 Terminal plating : Tin plating 0.5 μ m min.
 Underplating : Nickel plating 2 μ m min.

1	Copper alloy	5					
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
mm		10 : 1					
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	15.01.22	DRAWING NO.		EDC-118388-01-00	
		CHECKED : HY. KISHI	15.01.22	PART NO.		HR41A-SC-111(01)	
		DESIGNED : HN. TANAKA	15.01.22	CODE NO.		CL141-0213-5-01	
		DRAWN : HN. TANAKA	15.01.22				